

W3000 Digital Projector



Features

- CinematicColor Rec. 709 color gamut
- 1.6X zoom short-throw lens
- H/V lens shift
- Auto-vertical & 2D keystone
- CinemaMaster Video & Audio Enhancer

Box Contents

- Lens Cover
- Remote Control with Battery
- Power Cord (by region)
- User Manual CD
- Quick Start Guide
- Warranty Card
- DLP 3D Glasses

Dimension




Optional Accessories

- Spare Lamp Kit
- Ceiling Mount
- Carry Bag
- Wireless FHD Kit (WDP01)



Because it matters

Input and Output Terminals

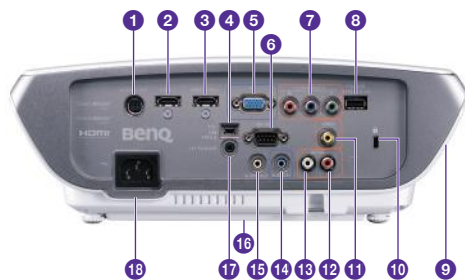

- 1 I2. 3D SYNC OUT
- 2 HDMI 1 input jack
- 3 HDMI 2 / MHL dual mode port
Also can be charging connected MHL compatible smart device as long as the projector is powered on.
- 4 USB Mini B input jack
Used for service.
- 5 PC input jack
- 6 RS-232 control port
Used to interface with a PC or home theater control/automation system.
- 7 COMPONENT input jacks
- 8 USB Type A 1.5A
Used for charging the receiver box of the Wireless FHD Kit (WDP01) (optional accessory)
- 9 Audio speaker
- 10 Kensington anti-theft lock slot
- 11 VIDEO input jack
- 12 AUDIO input jack (R)
- 13 AUDIO input jack (L)
- 14 AUDIO input jack
- 15 AUDIO output jack
- 16 Quick-release foot
- 17 12V TRIGGER out jack
Used to trigger external device such as an electric screen or light control, etc. Consult your dealer for how to connect these devices.
- 18 AC power cord inlet

Product Specifications

Projection System	DLP
Native Resolution	1080p (1920 x 1080)
Brightness	2000 AL
Contrast Ratio	10000:1
Display Color	1.07 Billion Colors
Lens	F = 2.42 - 3.05, f = 17.22 - 27.37 mm
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)
Throw Ratio	1.15 - 1.86 (100" @ 2.5m)
Image Size (Diagonal)	36"~196" / 300"
Zoom Ratio	1.6:1
Lamp Type	260W
Lamp Mode (Normal/Eco/SmartEco/LampSave)*	2000 / 3500 / 4000 hours
Keystone Adjustment	Auto Vertical & Manual Horizontal ± 30 degrees
Projection Offset	115% $\pm 2.5\%$
Lens Shift	Vertical: $\pm 12.5\%$ / Horizontal: -2.5% - 2.5%
Resolution Support	VGA(640 x 480) to WUXGA_RB (1920 x 1200) *RB = Reduced Blanking
Horizontal Frequency	15 - 102KHz
Vertical Scan Rate	23 - 120Hz
Color Wheel Segment	6-Segment (RGBRGB)
Color Wheel Speed	6x (50Hz), 4x (60Hz)
Compatibility	HDTV Compatibility Video Compatibility 3D Compatibility (Please refer to User's Manual for detailed support timing)
Interface	PC (D-Sub) x 1 Composite Video In x 1 Component Video In x 1 HDMI x 2 MHL x 1 (Share with HDMI-2) Audio In x 1 Audio L/R In x 1 Audio Out x 1 Chamber Speaker 10W x 1 USB (Type A) x 1 (5V/1.5A power supply) USB (Type mini B) x 1 (Service) RS232 x 1 DC 12V Trigger x 1 IR Receiver x 2 (Front & Top) 3D Sync Out x 1
Dimensions	Dimensions (W x H x D) 330 x 120 x 247 mm Weight 4.2 kg (9.26 lbs)
Power	Power Supply AC100 to 240V, 50 to 60 Hz Power Consumption Normal 330W, Eco 280W, Standby <0.5W
Audible Noise	33/29 dBA (Normal/Economic mode)
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Modes	** ISF Disabled: Bright / Vivid / Cinema (Rec. 709) / Game / User 1 / User 2 / (3D) *** ISF Enabled: Bright / Vivid / Cinema (Rec. 709) / Game / User 1 / User 2 / ISF Night / ISF Day / (3D)**
Environmental Notice	Lamp in this product contains mercury. To dispose of the product or used lamps, consult your local environment authorities for regulations or see www.lamprecycle.org .

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

** Default picture mode is Standard. When 3D is on, picture mode menu only show 3D. When 3D is off, 3D will also disappear.

*** When ISF is enable, default picture mode is ISF Night. When 3D is on, picture mode only show 3D. When 3D is off, 3D will also disappear.

Logistics information

Product Code	9HJEF77.27E
EAN Code	471 8755 06052 6
Dimensions Single Carton (cm)	39.3 x 21.8 x 43.8
Carton Weight (kg)	6,7
Pallet Size Block (cm)	120 x 100 x 187.2



BenQ Europe B.V.
Meerenakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200
Fax: +31 88 8889299

© 2015 BenQ Corp. Specification may vary by region, please visit your local stores for details.
Actual product's features and specifications are subject to change without notice.
This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301

